

CAPACITY

45,000 BTU/H @ 45° F evap. temp/110° F liq. temp, 60 HZ. For higher capacities, we offer multiple evaporators for use with larger Lintern condenser sections.

MOUNTING CONFIGURATIONS

Indoor Ceiling Mount Only. Specially designed for electric room cooling

WELDED FRAME CONSTRUCTION

Heavy (#16 GA) frame, stainless steel drip pan. Epoxy coated.

EVAPORATOR COIL

Aluminum fin, copper tube. 8 fins per inch (3.2mm). Heavy gauge hardened fin stock 0.0095" (0.241mm) thickness. Epoxy coated.

BLOWER WHEEL / MOTOR

Motorized impeller.

VOLTAGES

230, 460/3/60Hz, VAC
220, 380-415/3/50Hz VAC
Supports DC-VFD power option for 240 VDC

REFRIGERANT FLOW CONTROL

Balance port thermostatic expansion valve.

MECHANICAL AIR FILTER

Polyester fiber cleanable filter.



REFRIGERANTS

HFC-134a

WEIGHT

150 LBS. (68kg.)

LHDE 256C EVAPORATOR

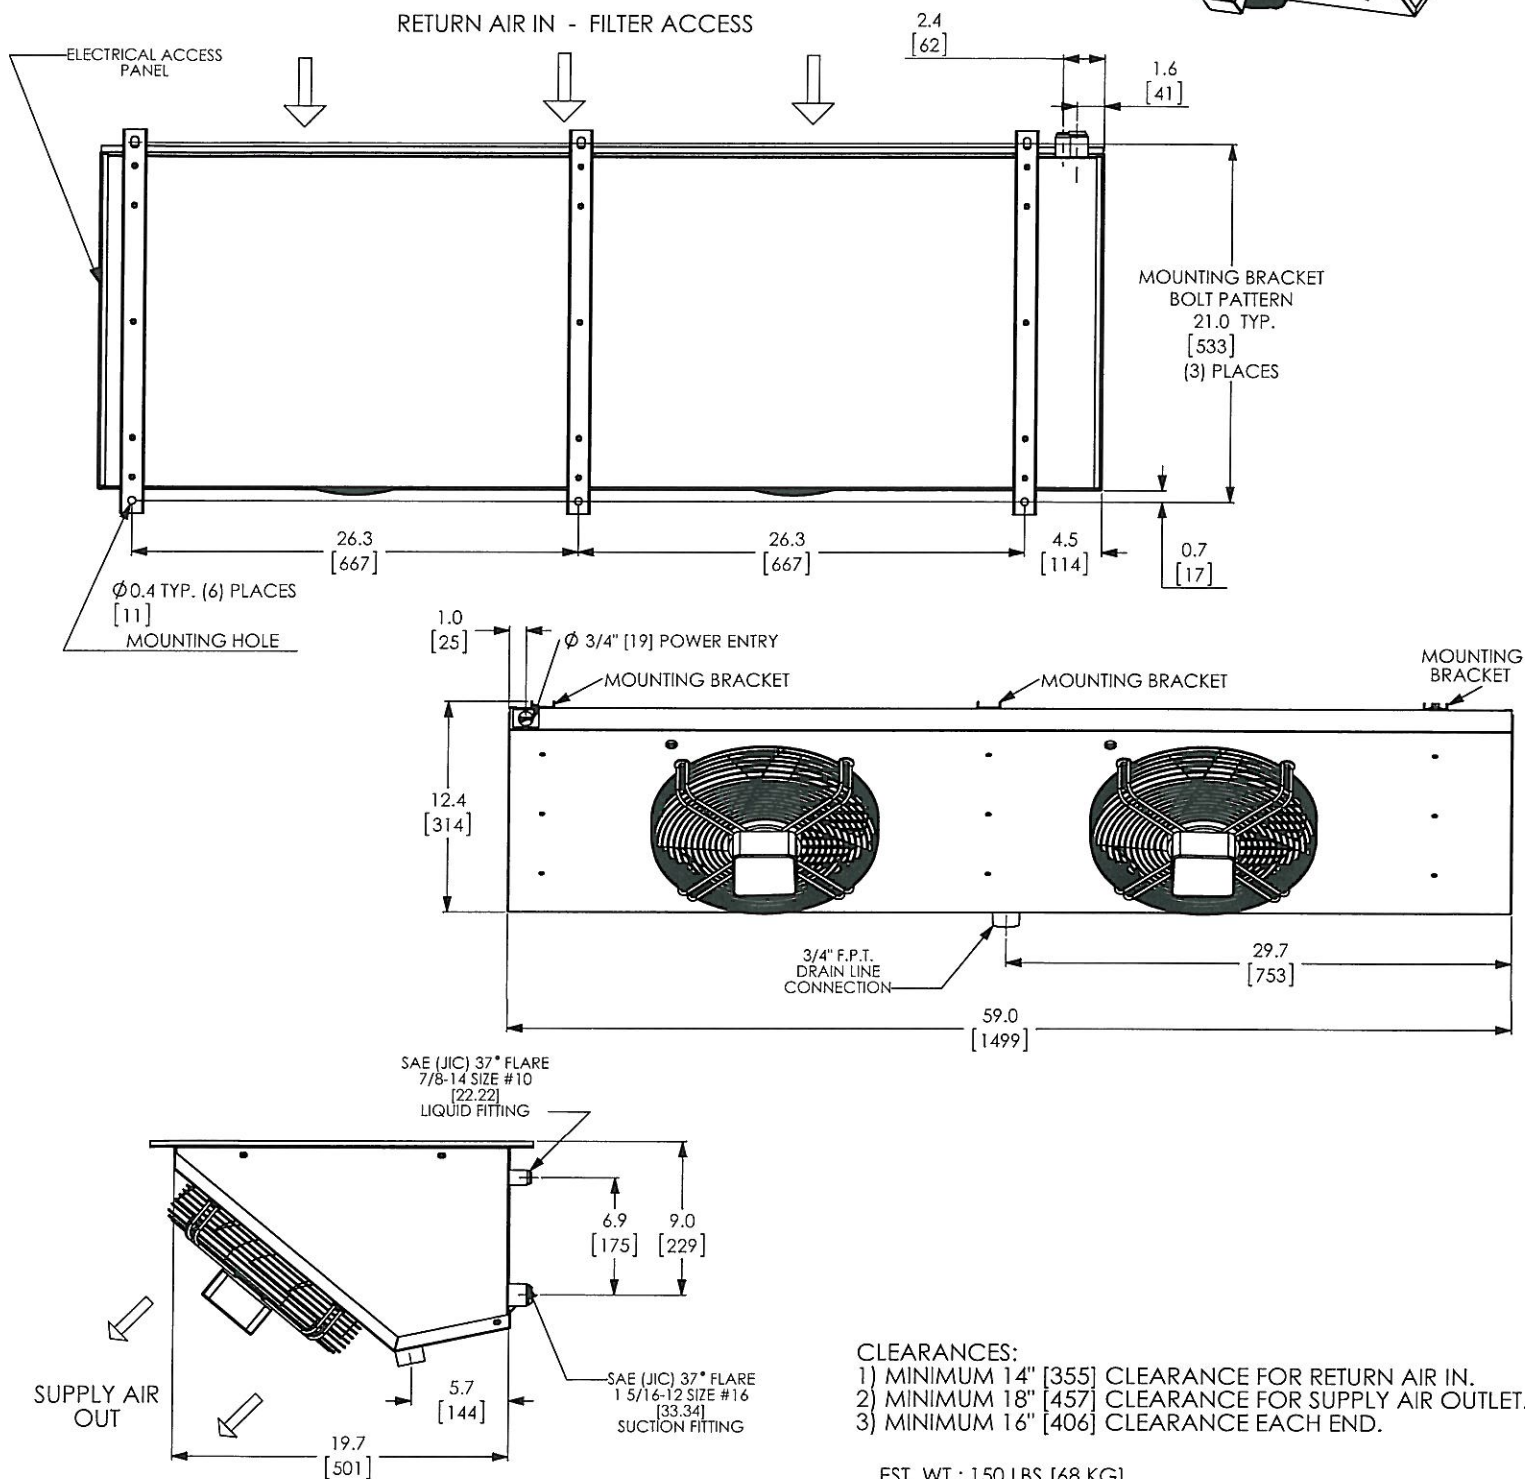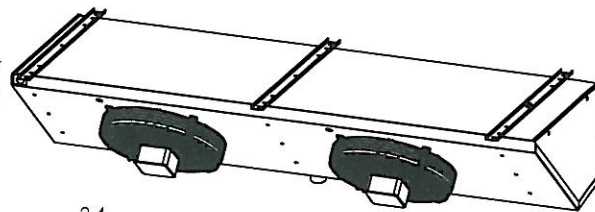

8685 Station Street • P.O. Box 90 • Mentor, OH 44061-0090 USA

Phone 800.321.3638 toll free (North America) or 440.255.9333 • Fax 440.255.6427 • Email solutions@lintern.com
 www.lintern.com